



# Non-insulated aluminium flexible duct

# COMDEC

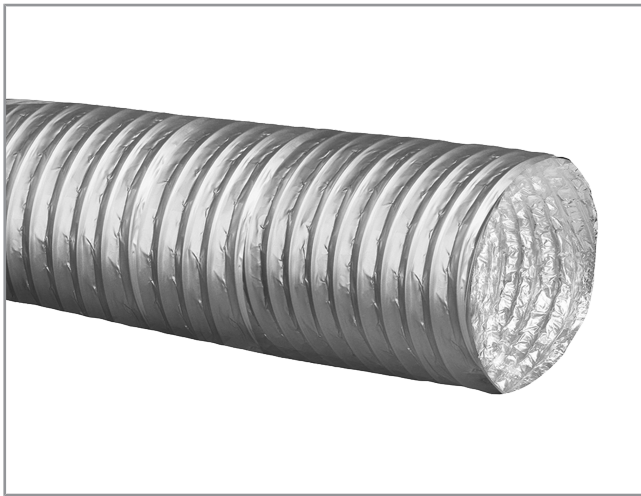

## Dimensions

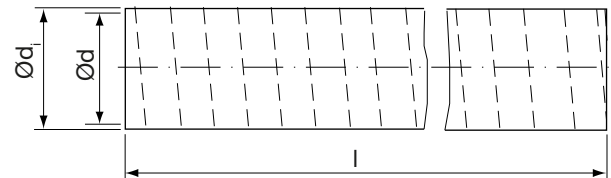

## Description

Multiple layer product made up of a PVC coated aluminium into a flexible duct supported by a steel wire helix.

### Applications

Suitable for use in general ventilation applications including fresh air intake and exhaust, and kitchen and bathroom.

## Technical data

$\text{Ød}_{\text{nom}}$ mm	$\text{Ød}_1$ mm	$\frac{O}{\pi d}$ m	$A$ $\frac{\pi d^2}{4}$ m <sup>2</sup>	$l$ mm	$m$ kg
80	82	0,258	0,005	10000	1,23
100	102	0,320	0,008	10000	1,36
125	127	0,399	0,013	10000	1,62
160	160	0,503	0,020	10000	2,02
200	203	0,638	0,032	10000	2,54
250	254	0,798	0,051	10000	3,24
315	315	0,999	0,079	10000	4,01
400	406	1,282	0,131	10000	6,45
500	508	1,602	0,204	10000	7,92

Specifications	
Duct materials	Aluminium PVC Steel wire helix
Temperature range	-30 to +140 °C
Packing	Individual box

## Order code

Product	COMDEC
Dimension Ød	160
Length l	10000

Order example: COMDEC-160-10000